

DOUBLE-SWING TRAFFIC DOOR

POLYETHYLENE, WATER-REPELLENT, IMPACT-RESISTANT AND FOOD-GRADE CERTIFIED

FOOD
INDUSTRY

CATERING



DOUBLE-SWING
TRAFFIC DOOR

SP800

DEVELOPED TO MEET SAFETY STANDARDS IN FOOD ENVIRONMENTS

- With excellent impact resistance, **resistance to water and corrosion**, the **SP800** door is made from materials that comply with **food standards**: HDPE 500, grade 304L or 316L stainless steel.
- It is **particularly suited** to food industry environments, **professional and institutional kitchens** and other **wet and corrosive environments**.



FEATURES & BENEFITS



Water-repellent,
can be hosed down



Ultra
impact-resistant



Corrosion-proof and
unaffected by cleaning
products



Perfect hygiene with
portholes/vision panels
always flush mounted



Certified food safe



Resistant to cold

- Made to measure and supplied ready to fit**, the **SP800** double-swing door can be installed just as well in new build as in renovation projects.
- Available with one or two leaves**, it will meet all your requirements.


TECHNICAL CHARACTERISTICS

FOOD INDUSTRY

CATERING

DOOR FRAME

- Brushed grade 304L stainless steel, 1.5 mm thick
- U- or C-shaped** frames for fitting in insulated panels or plasterboard partitions,
- L-shaped** frames for overlay mounting or fitting at the front edge of the reveal,
- Stainless steel plates or Omega profiles** for fastening on to the wall, to an existing frame or to a solid structure.

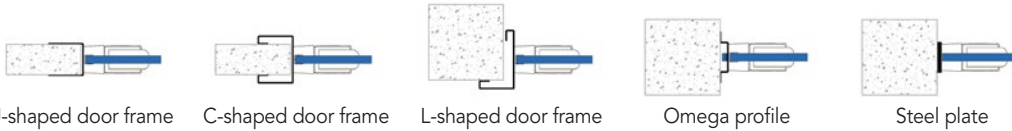

U-shaped door frame

C-shaped door frame

L-shaped door frame

Omega profile

Steel plate

HINGES

- With **SPENLE** all stainless steel mechanism and Delrin® body, available with or without hold open feature,
- All stainless steel **SPENLE** hinges, available with or without 90° hold open feature,
- Stainless steel double-acting hinges, available only without 90° hold open feature.



All stainless steel **SPENLE** hinge with Delrin® body



All stainless steel **SPENLE** hinge



Stainless steel double-acting hinge

DOOR LEAF

- Made of food-grade polyethylene (HDPE 500), through-coloured, 15 mm thick,
- Rear reinforcement with a stainless steel U-profile,
- Flexible anti-finger pinch seal, transparent, rounded edge,
- PMMA porthole, diameter 350 mm, 15 mm thick, flush on both sides for very easy cleaning and irreproachable hygiene.

OPTIONS

- Oblong vision panel, flush on both sides, 300 x 500 mm, 400 x 600 mm or 250 x 400 mm for narrow leaves,
- Stainless steel or polyethylene door kick plates,
- Polyethylene or stainless steel kick plates with integrated door edge guards for high-traffic uses,
- Stainless steel push plates,
- Single-acting operation – for one-way traffic,
- Anti-finger pinch only in the top part, above 800 mm above the ground for high traffic uses,
- Grade 316L stainless steel or powder-coated 316L stainless steel door frames for the most aggressive atmospheres,
- Leaves lock with or without a key,
- Specific door frames or fastening systems to meet your needs, for renovation jobs in particular.

COLOURS



Snow white

Ocean blue

Emerald green

Lime green

Mimosa yellow

Poppy red

Pearl grey

Graphite grey

Slate black

DOUBLE-SWING DOOR

SP800

IN FOOD INDUSTRY SETTINGS
THE SP800
WATER-REPELLENT DOOR
is ideally suited to:

- food factories, abattoirs, and fish, dairy or cheese processing facilities...
- warehouses and distribution platforms,
- locker rooms and toilets, etc.



IN CATERING SETTINGS
THE SP800
WATER-REPELLENT DOOR
is ideally suited to:

- restaurant kitchens and school canteens,
- restaurant dishwashing rooms,
- high-traffic areas of central kitchens.

