

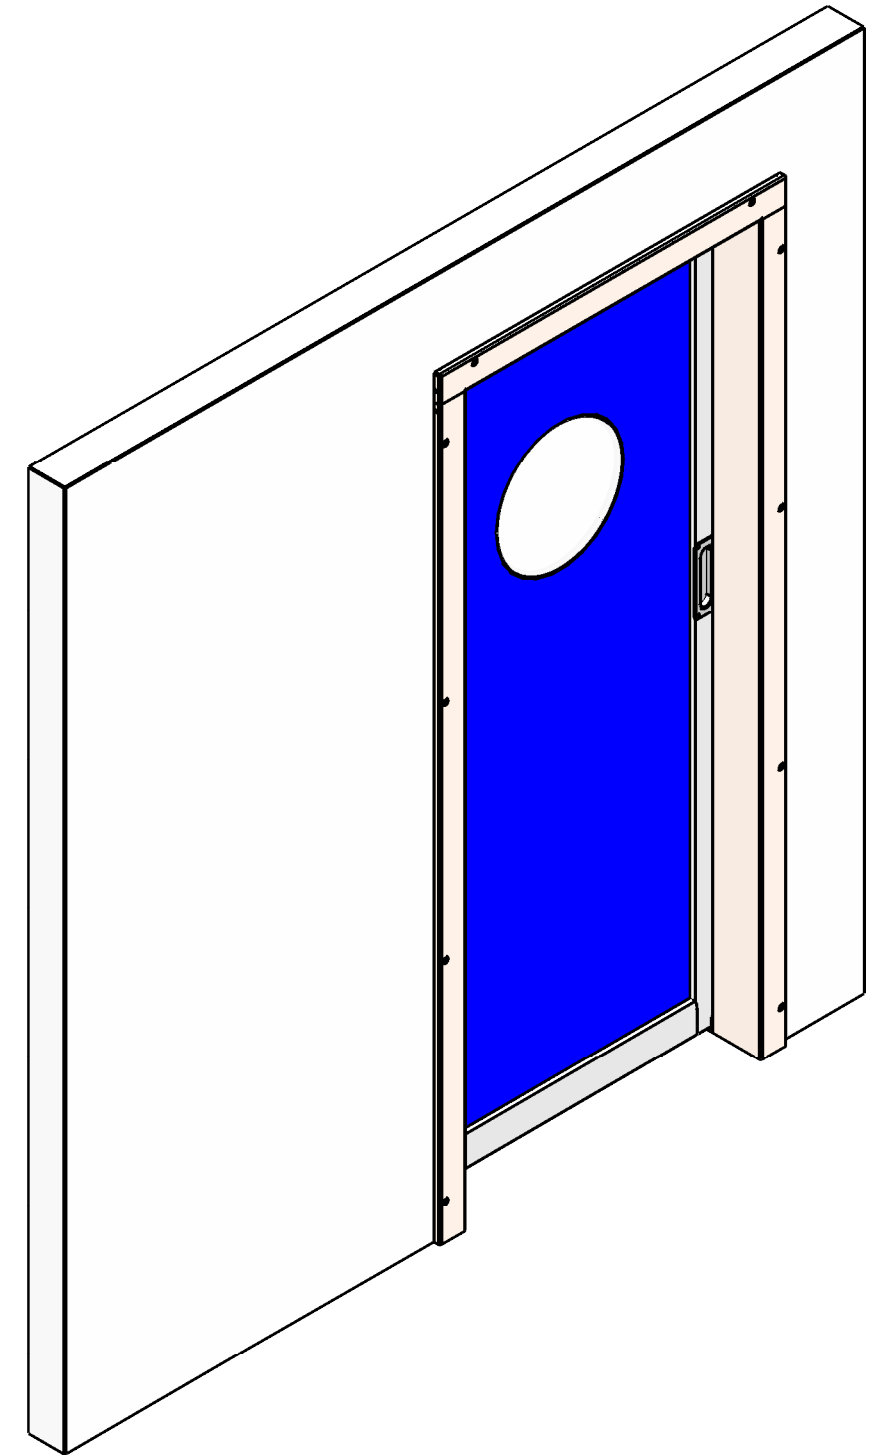
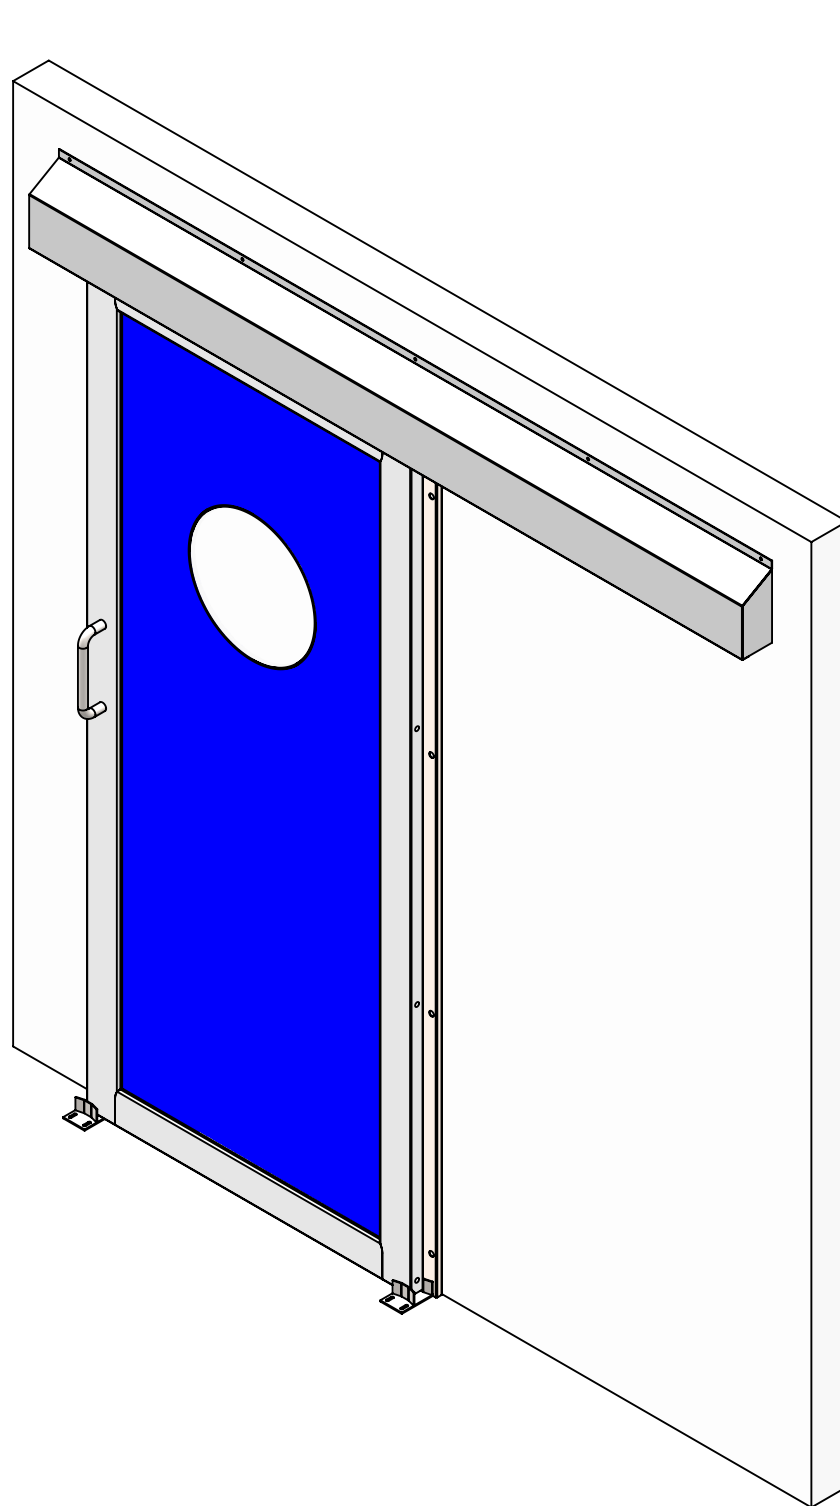


Polyethylene Sliding Door SP130 C

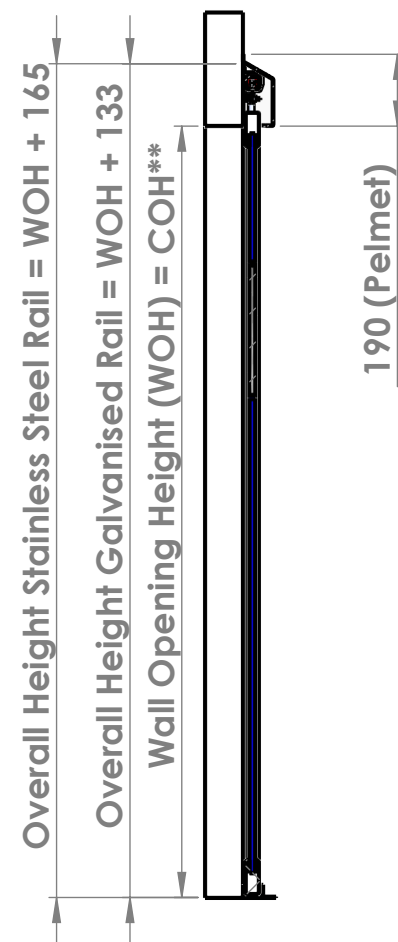


Door Type :	Stainless steel or galvanised steel track
SP130 C	With or without wall frame

SPENLE 
F-57400 SARREBOURG
+33 (0)3 87 25 78 00
www.spenle-international.com
info@spenle-international.com


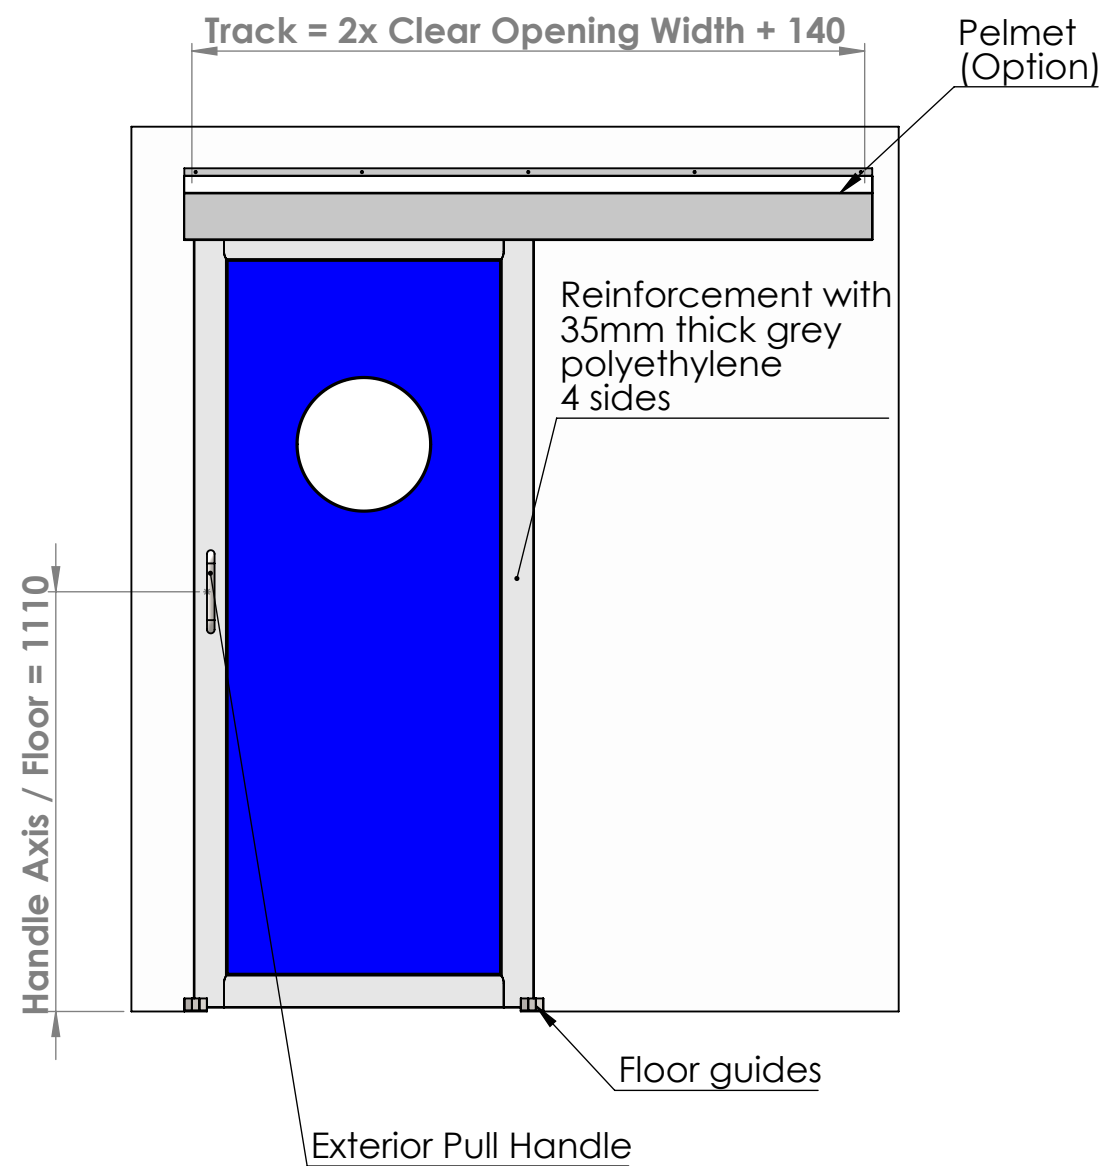


PMMA Window
 $\varnothing$ 350 mm
 flush on both sides
 (Option)


HDPE 500
 15 mm Thick

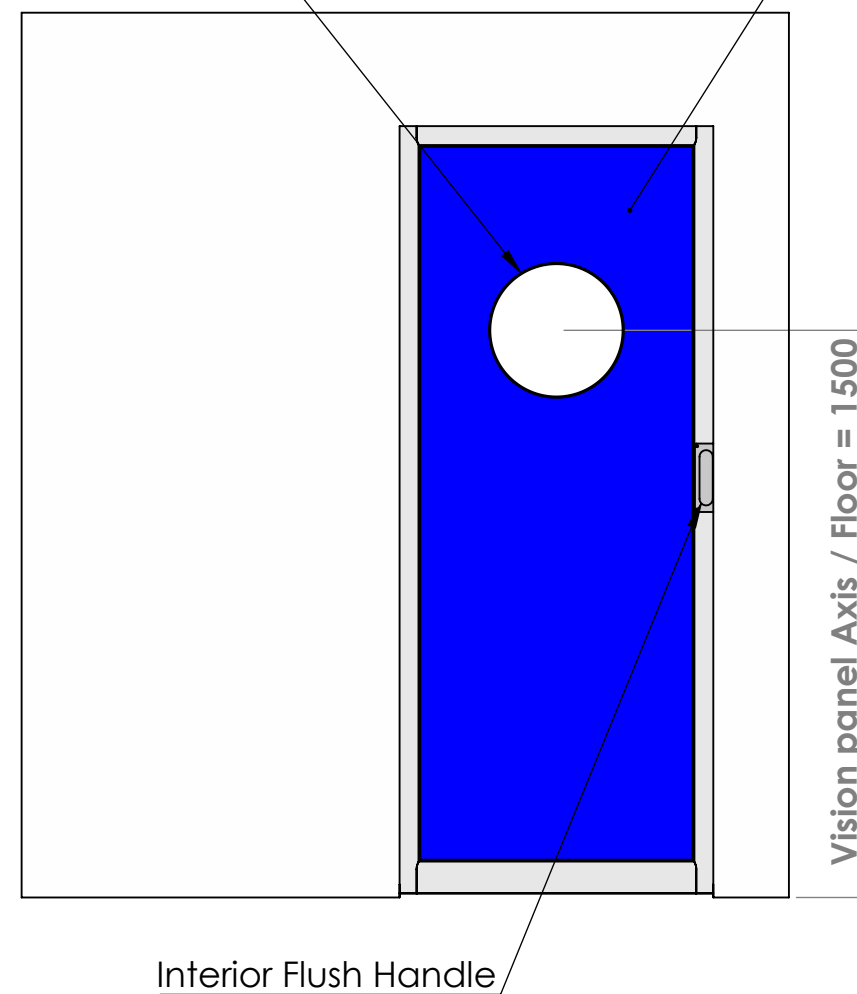


Wall Opening Width (WOW)

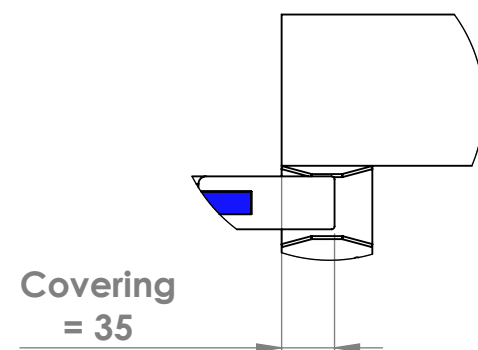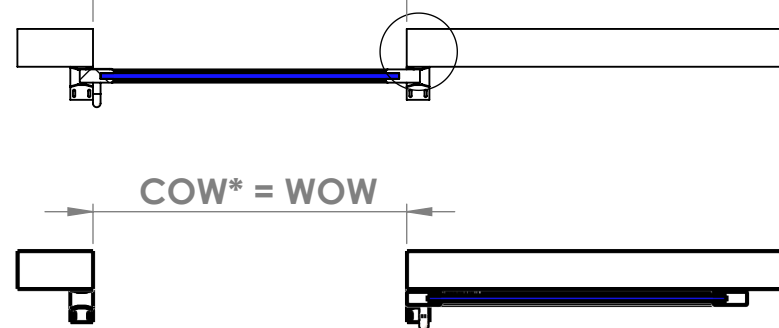

Door opening
to the left



Door opening
to the right



*COW : Clear Opening Width
 **COH : Clear Opening Height


Door Type :
SP130 C

Stainless steel or galvanised
 steel track

No wall frame

SPENLE 

F-57400 SARREBOURG
 +33 (0)3 87 25 78 00
www.spenle-international.com
info@spenle-international.com

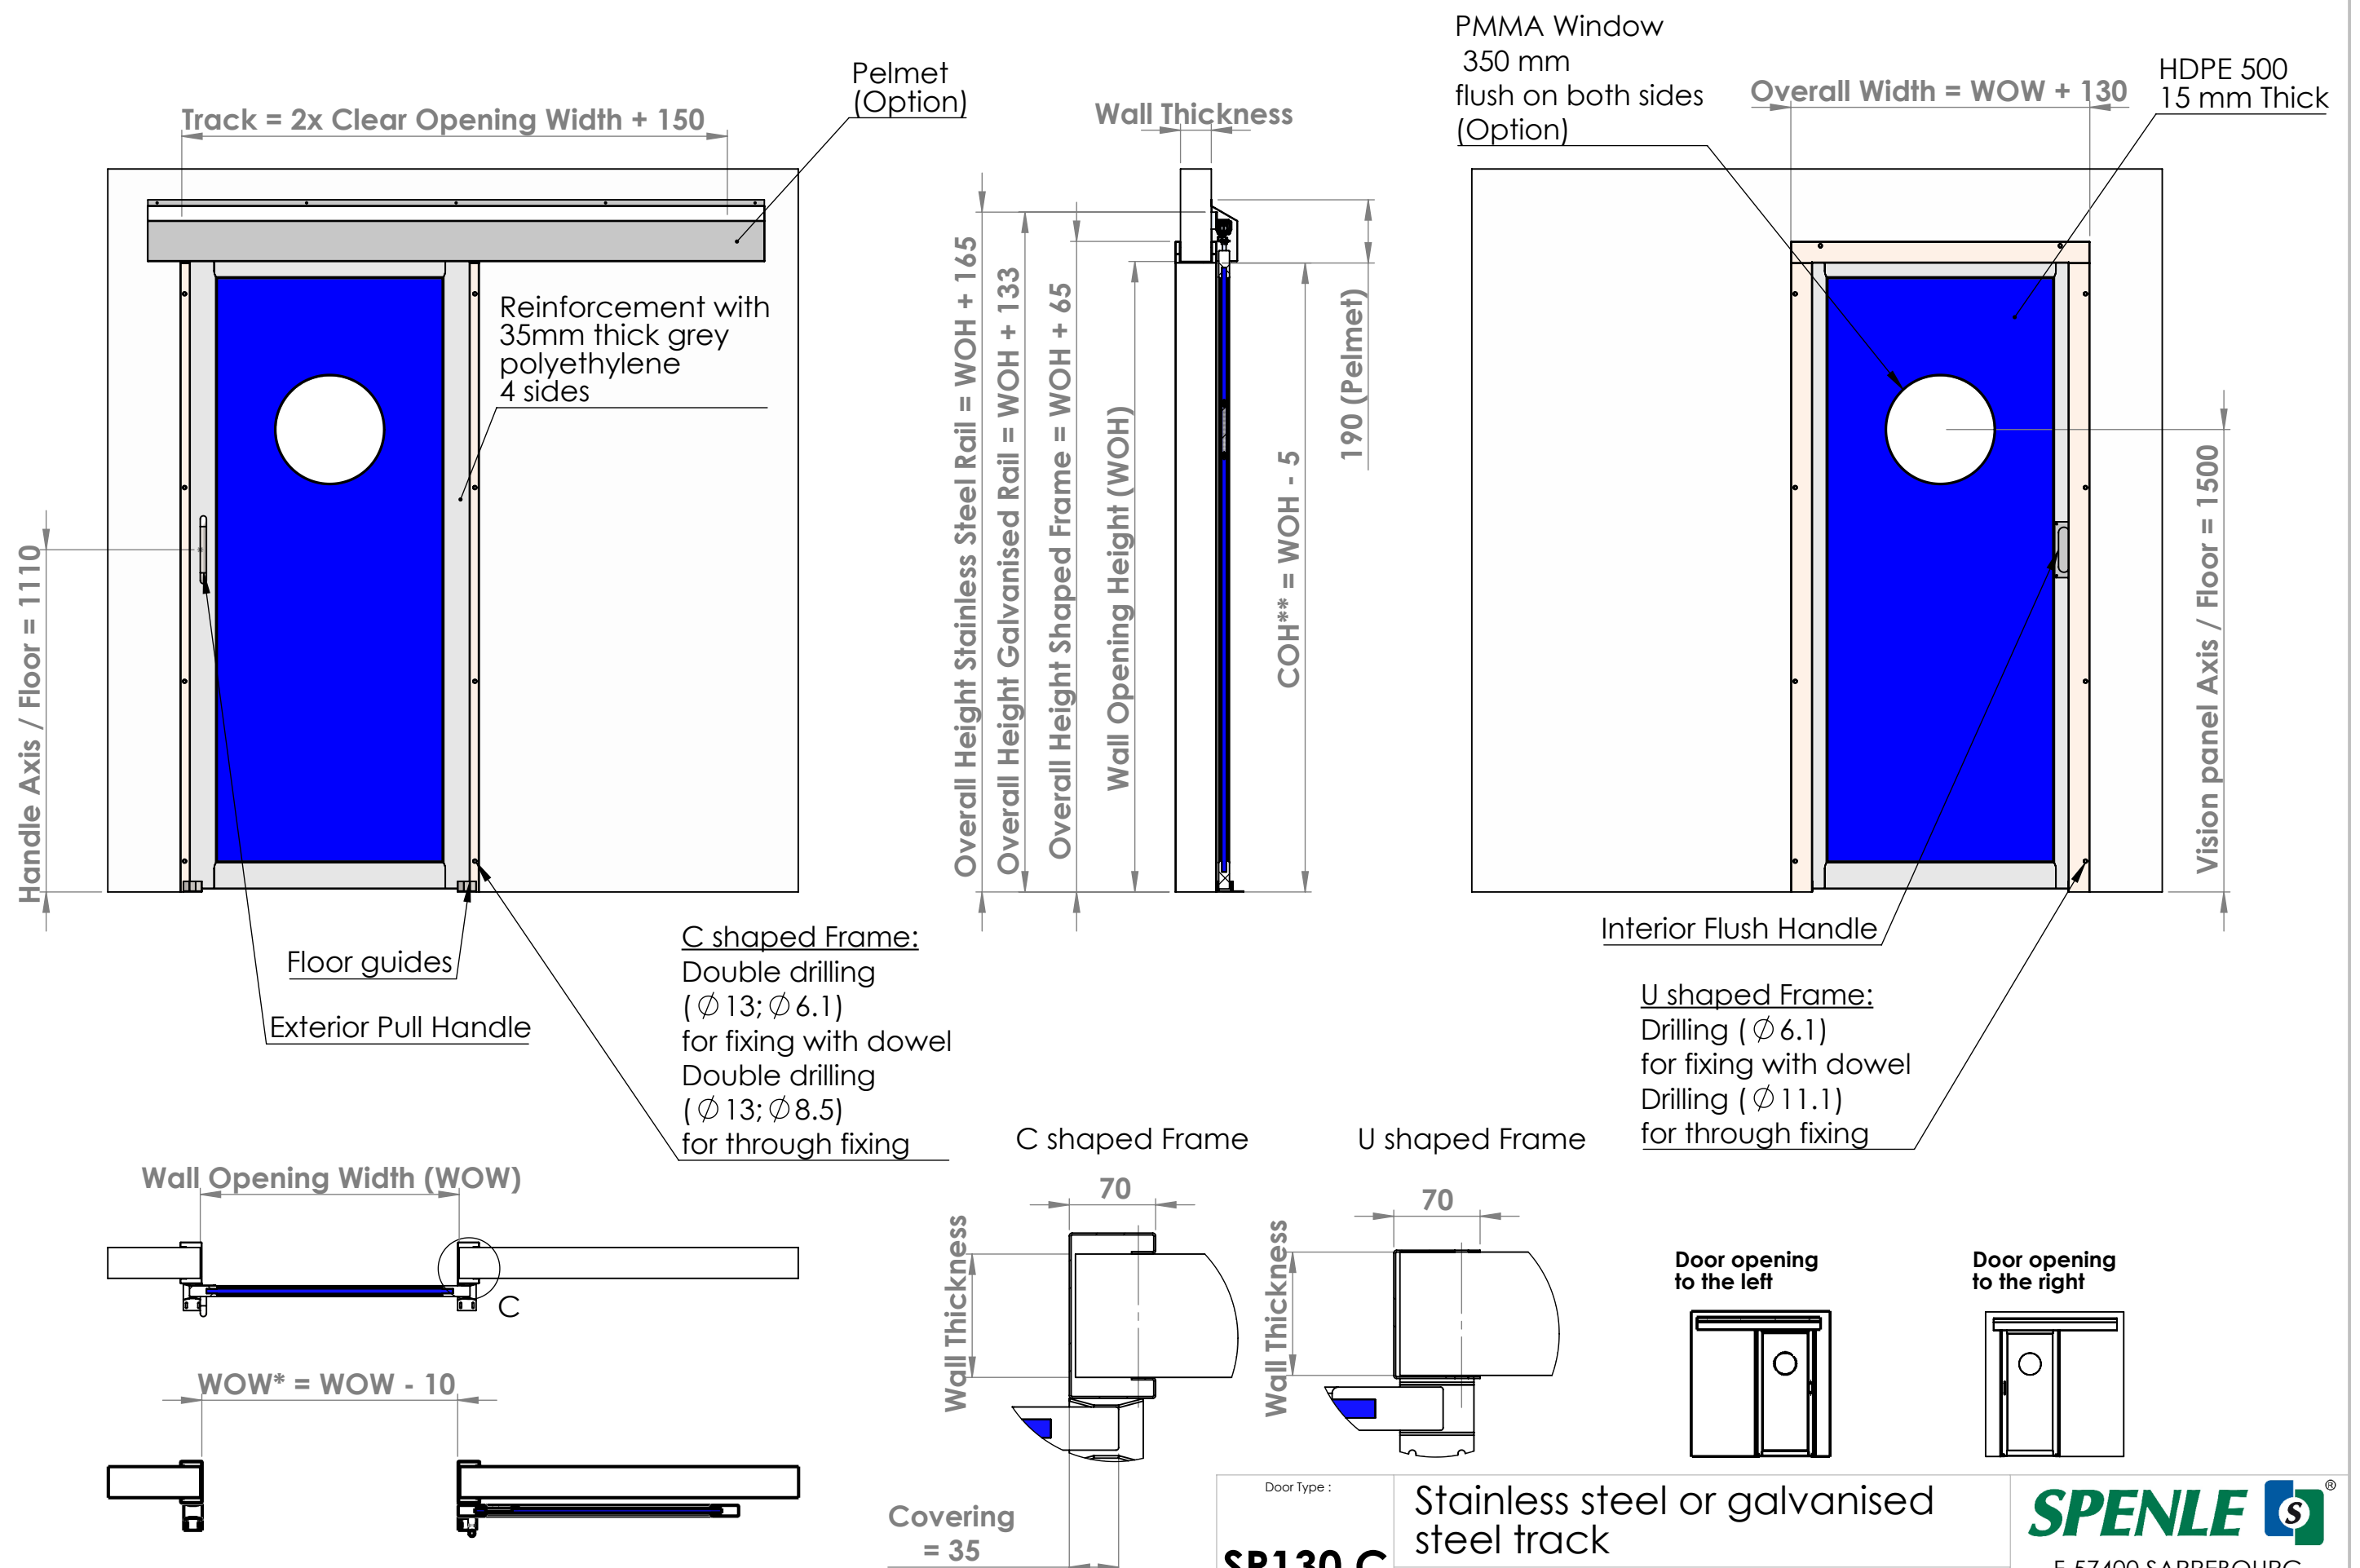

*COW : Clear Opening Width
 **COH : Clear Opening Height

Door Type :
SP130 C
 Stainless steel or galvanised steel track
 Stainless steel U or C shaped Frame

SPENLE 
 F-57400 SARREBOURG
 +33 (0)3 87 25 78 00
 www.spenle-international.com
 info@spenle-international.com