
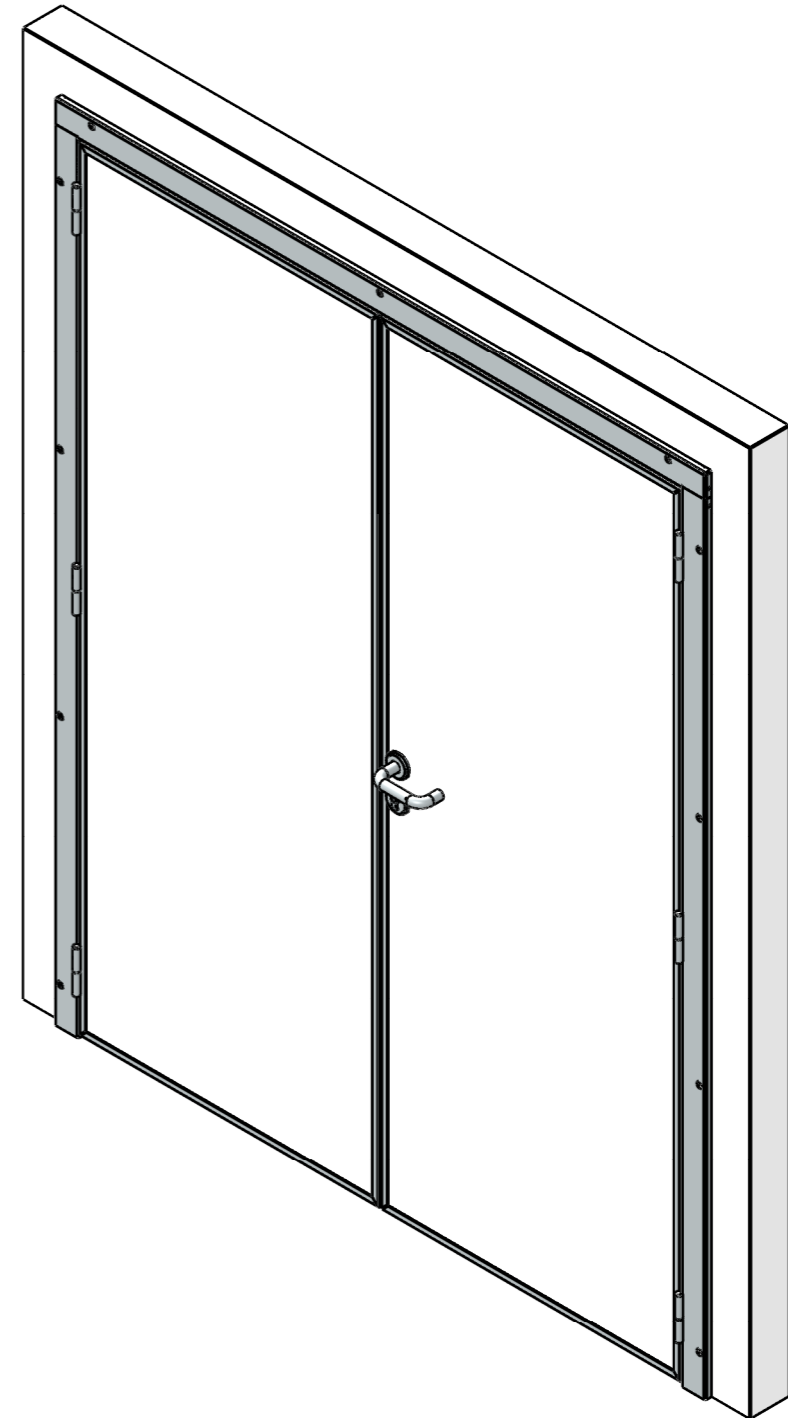


Semi-insulated Service Door SP100 / SP110 / SP120

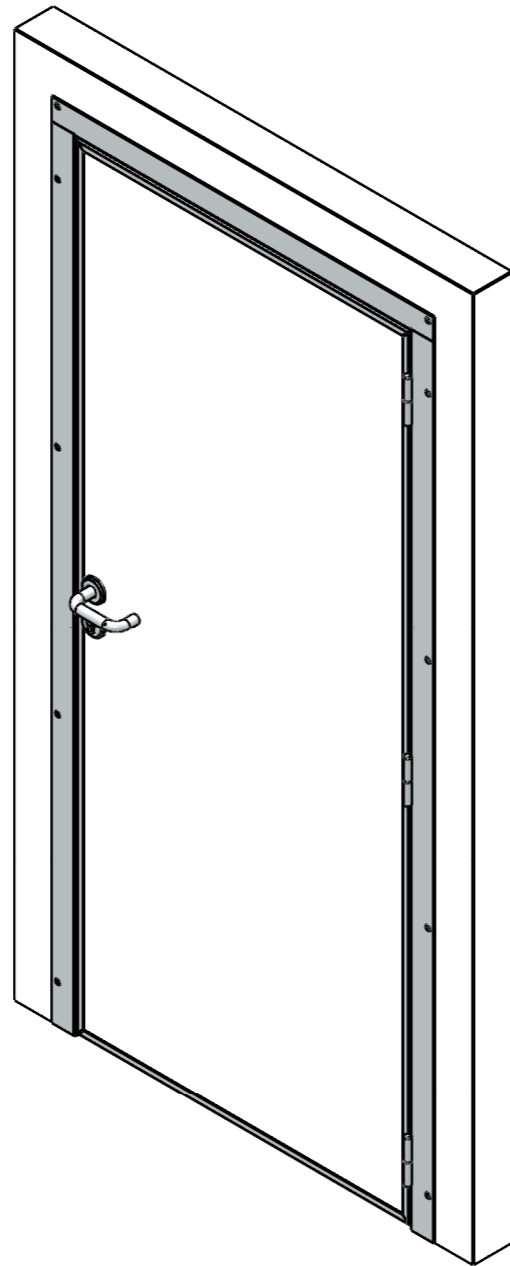

Leaf in :


- Pre-lacquered steel sheet (SP100)
- Polyester reinforced with fiberglass (SP110)
- 304L stainless steel sheet brushed finish (SP120)

Door Type :
SP100
SP110
SP120




Semi-insulated Service Door
Stainless steel U or C shaped
Frame

SPENLE 


F-57400 SARREBOURG
+33 (0)3 87 25 78 00
www.spenle-international.com
info@spenle-international.com

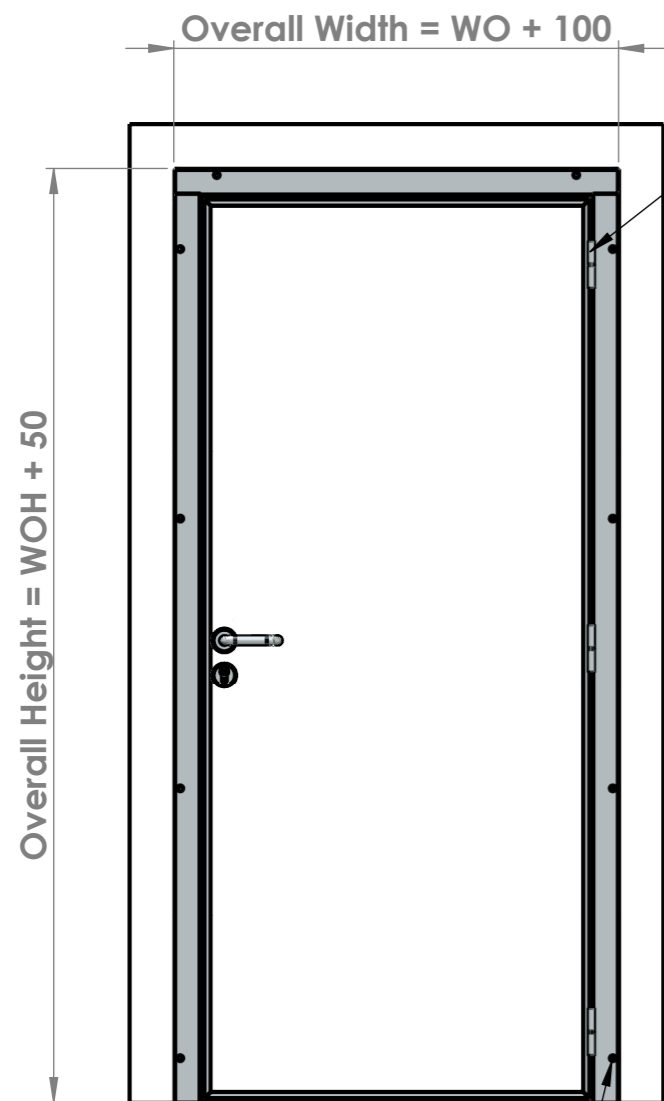

C shaped Frame:
Double drilling
($\phi 13$; $\phi 6.1$)
for fixing with dowel
Double drilling
($\phi 13$; $\phi 8.5$)
for through fixing

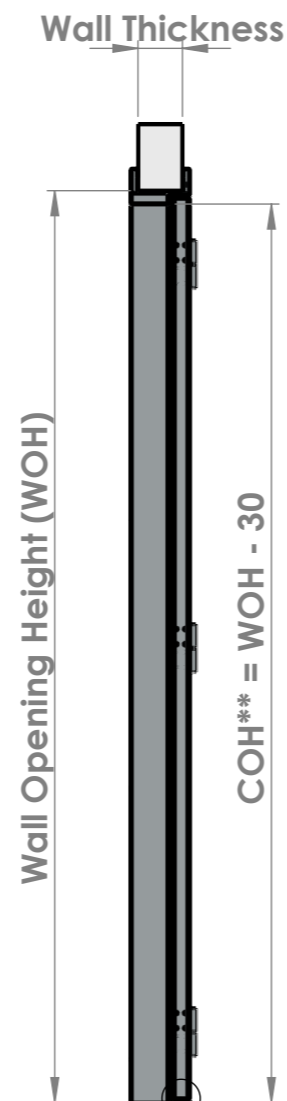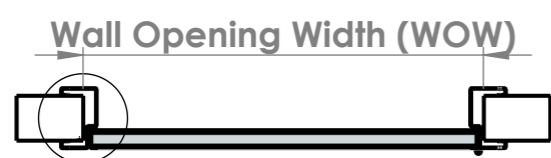


C shaped Frame

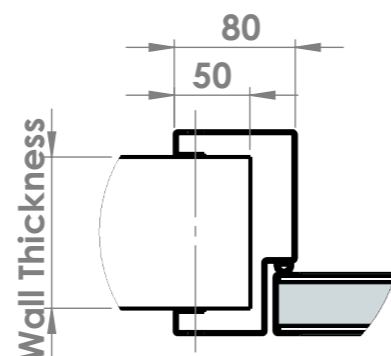


U shaped Frame:
Drilling ($\phi 6.1$)
for fixing with dowel
Drilling ($\phi 11.1$)
for through fixing


U shaped Frame

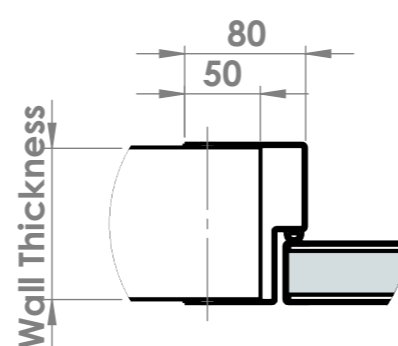


Polyurethane foam
core insulation

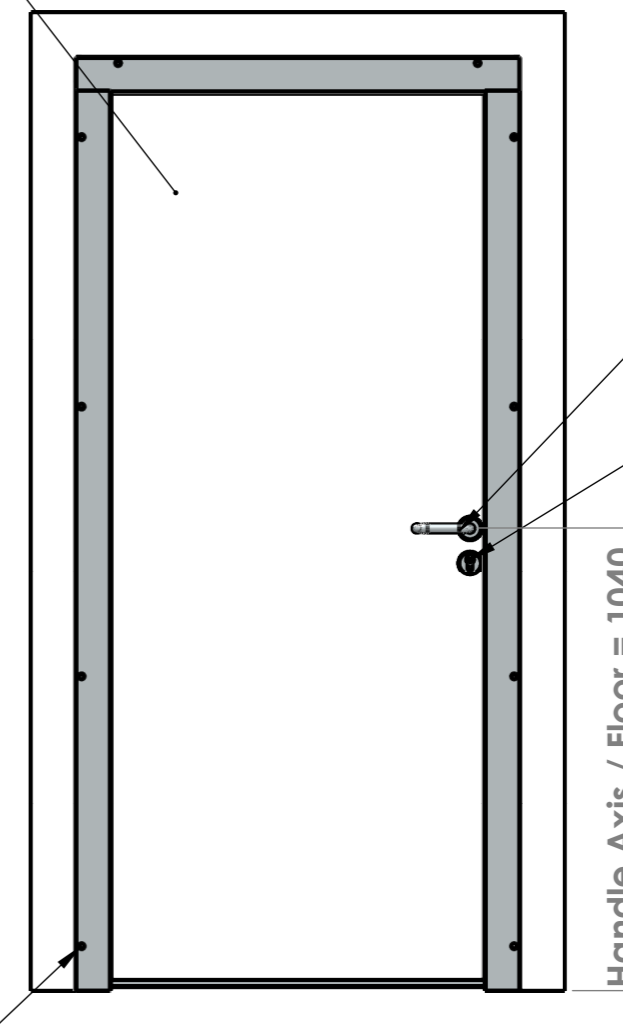

Right Pulling
Left Pushing

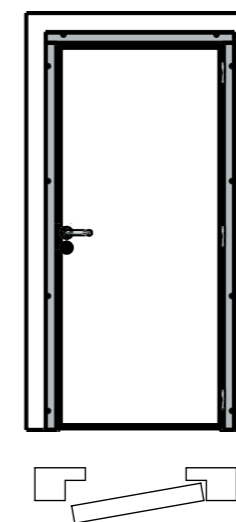

Left Pulling
Right Pushing

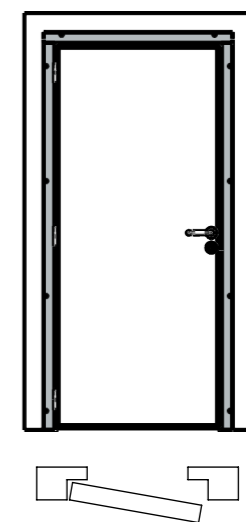


COW^* : Clear Opening Width
 COH^{**} : Clear Opening Height

Door Type :
SP100
SP110
SP120


Semi-insulated Service Door
Stainless steel U or C shaped
Frame

SPENLE 

F-57400 SARREBOURG
+33 (0)3 87 25 78 00
www.spenle-international.com
info@spenle-international.com

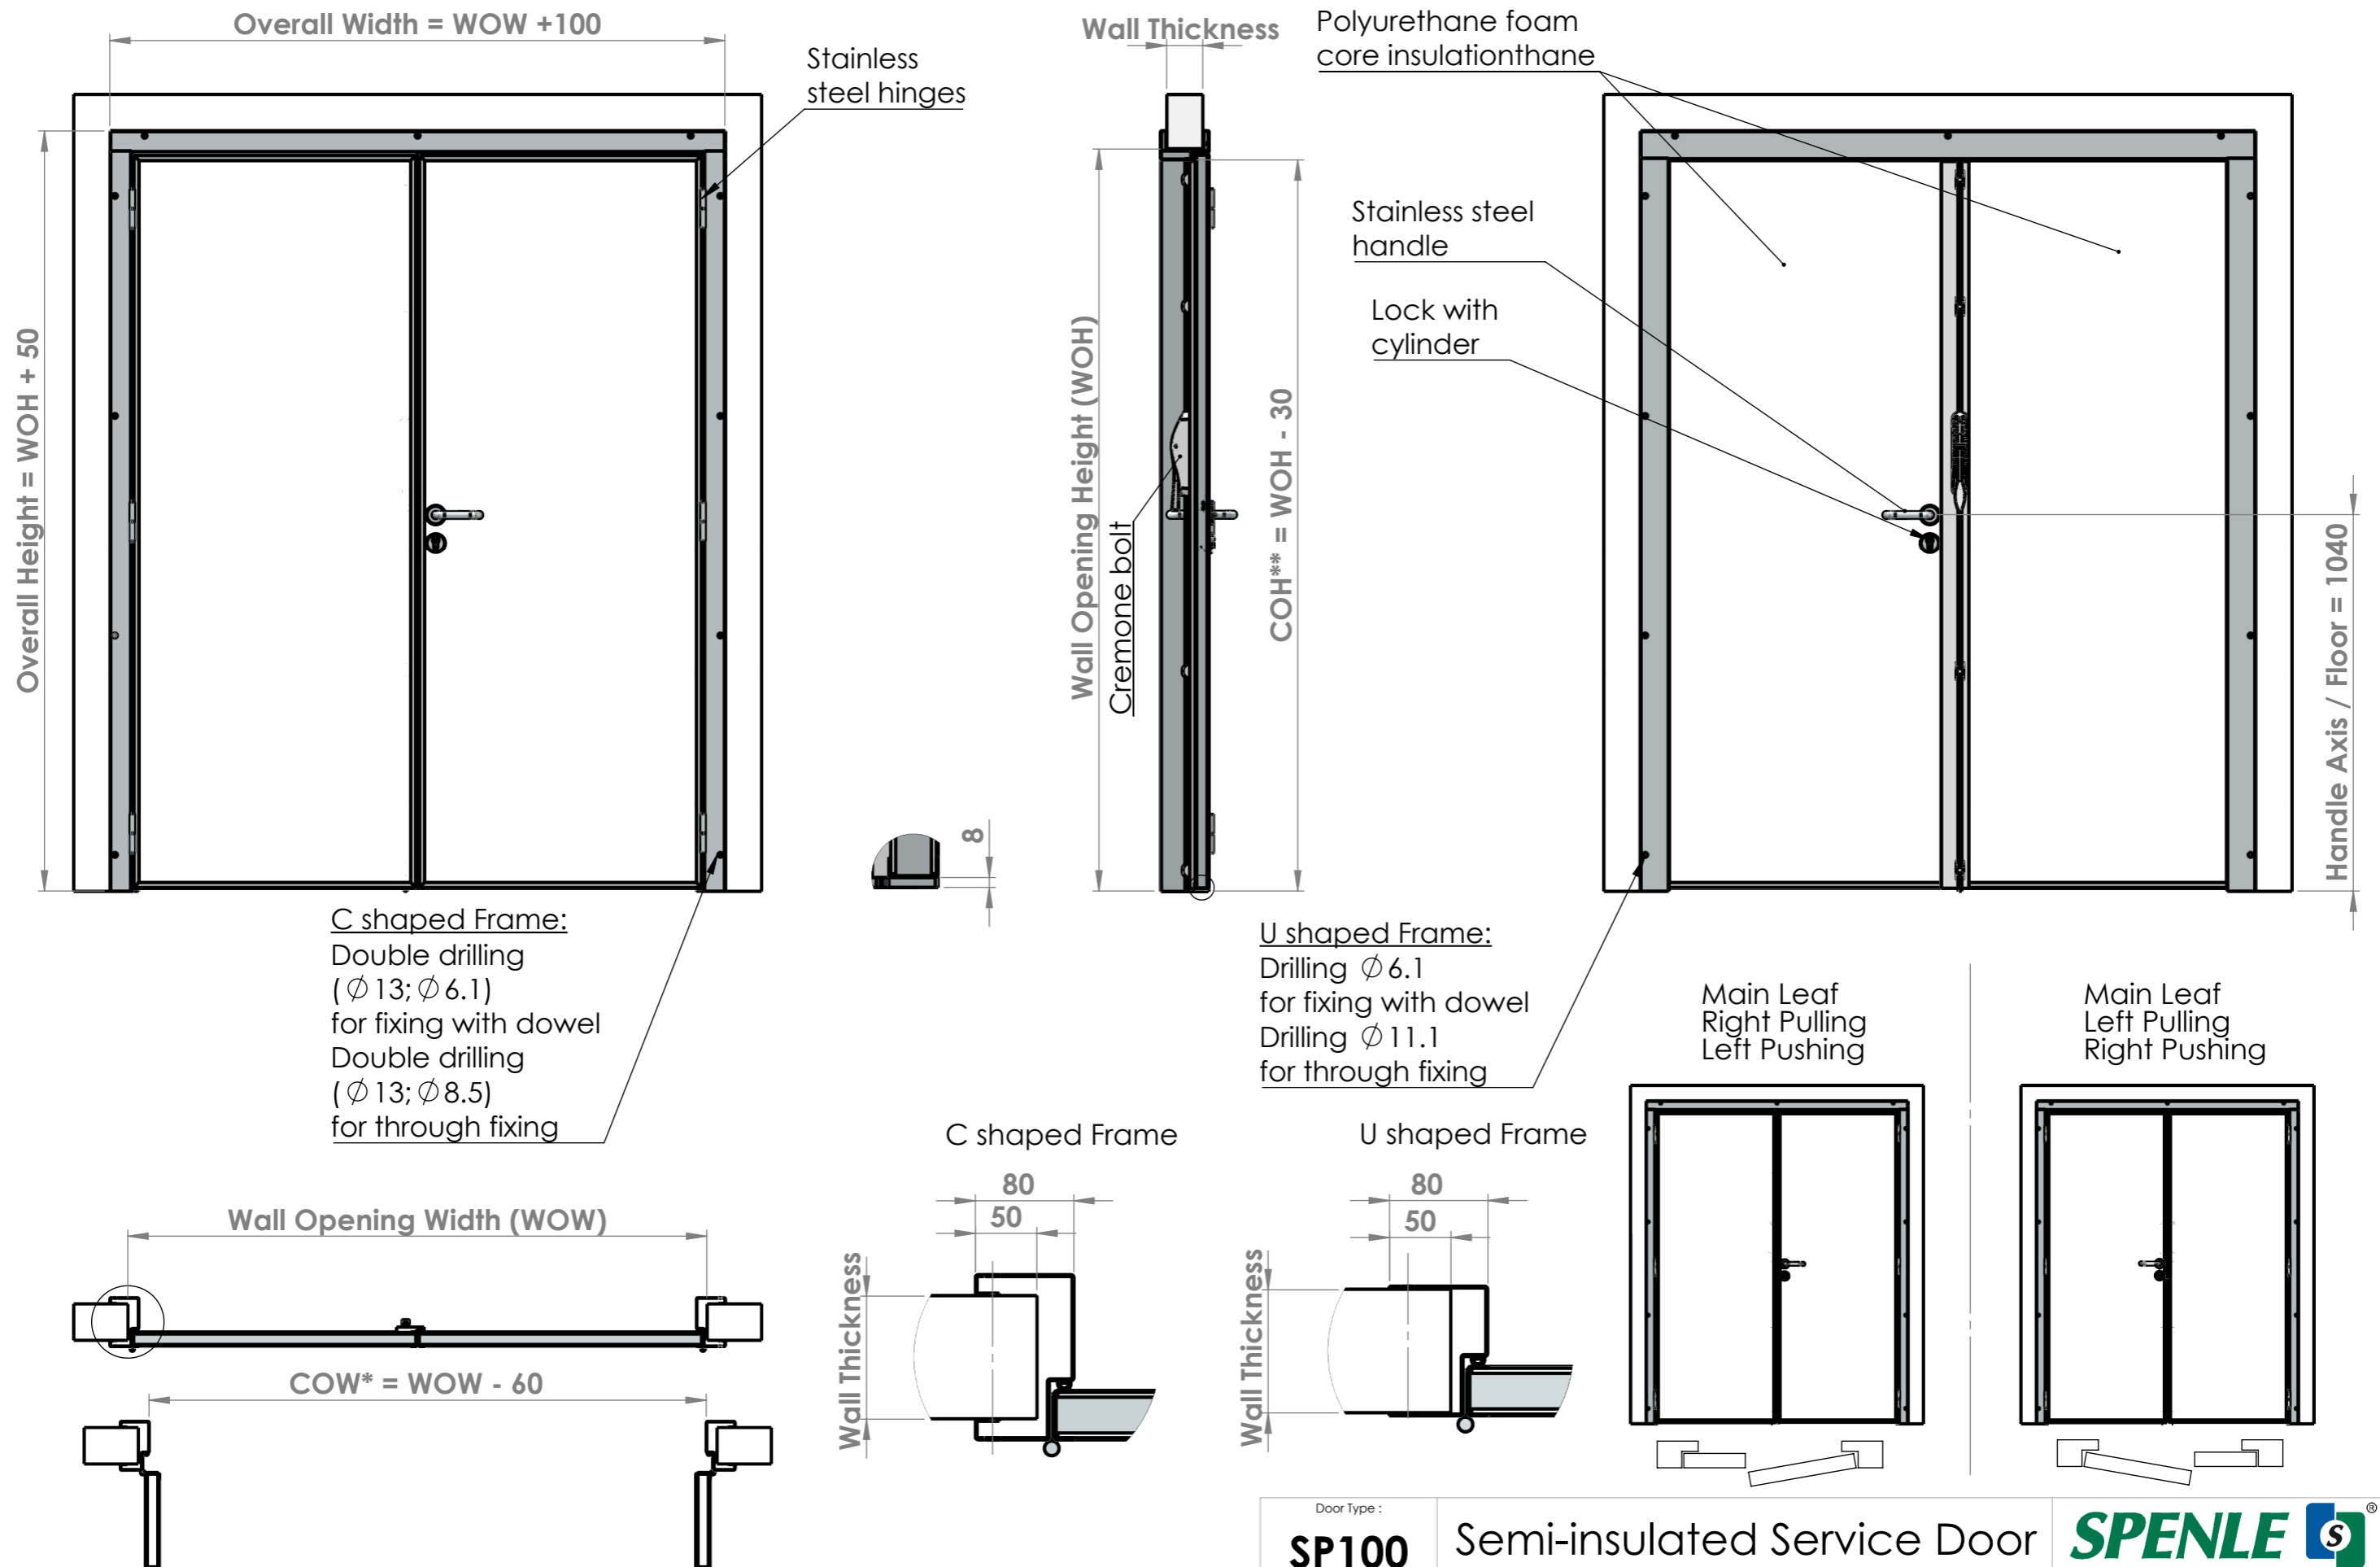

COW* : Clear Opening Width
 COH** : Clear Opening Height

Door Type : SP100 SP110 SP120	Semi-insulated Service Door Stainless steel U or C shaped Frame	SPENLE  F-57400 SARREBOURG +33 (0)3 87 25 78 00 www.spenle-international.com info@spenle-international.com
---	--	---