

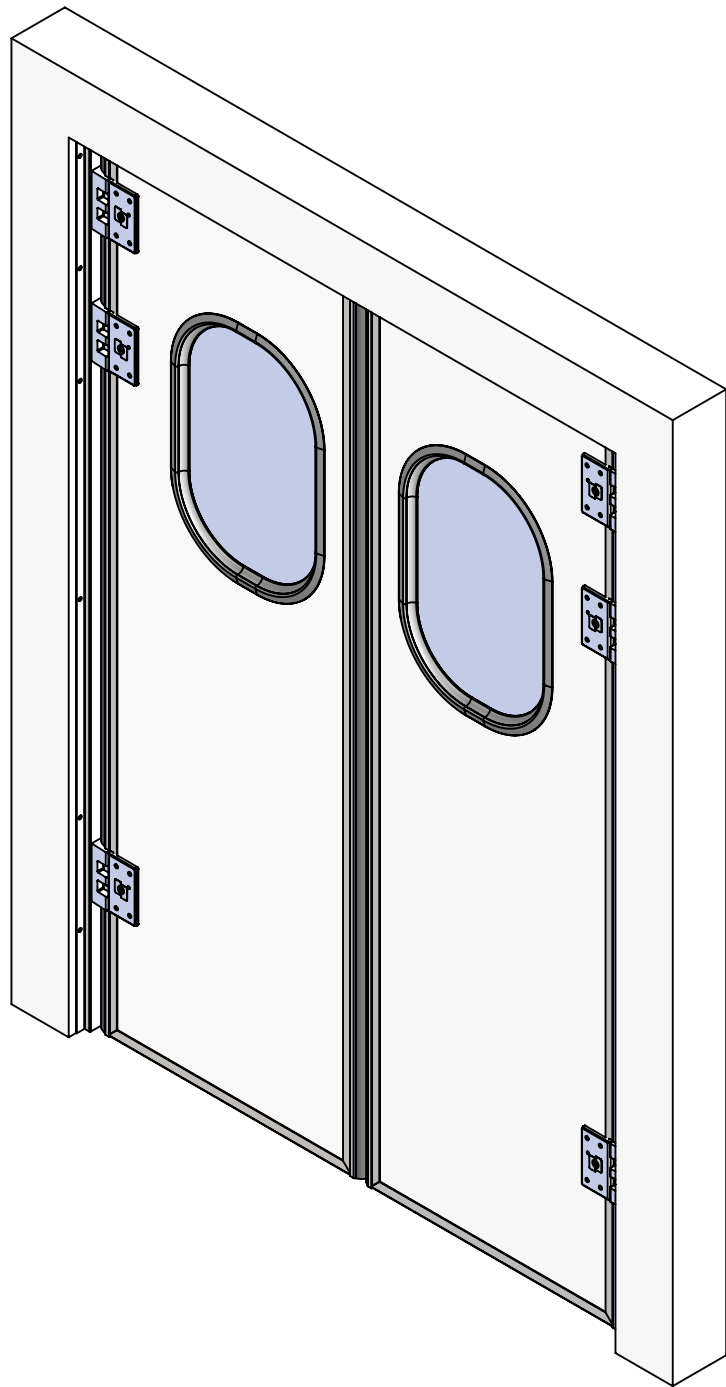


Semi-insulated Double-Swing Traffic Door SP900

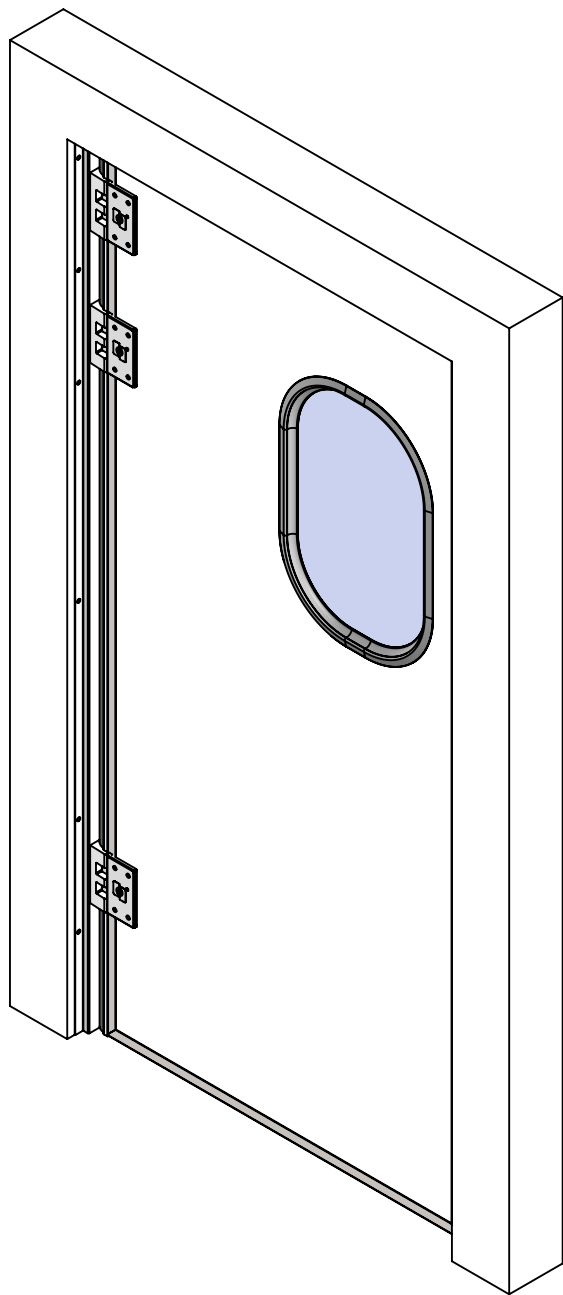

Leaf in pre-lacquered steel sheet

Type Porte :	Leaf with Delrin Hinges and all stainless steel mechanism	SPENLE  F-57400 SARREBOURG +33 (0)3 87 25 78 00 www.spenle-international.com info@spenle-international.com
SP900	Stainless steel Omega	

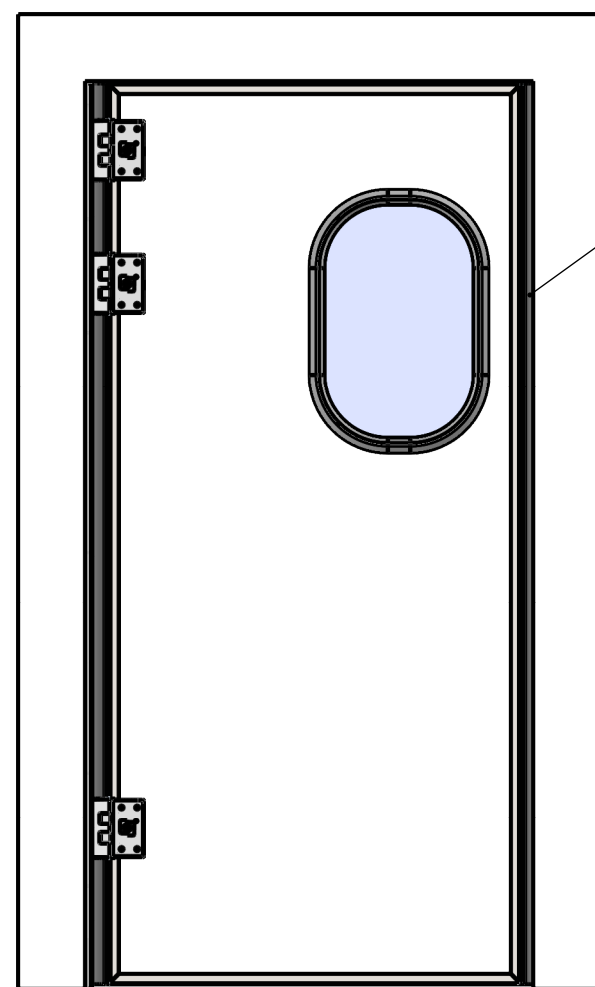

EPDM finger protection


Wall Opening Height (WOH) = COH**

Polyurethane foam core insulation

Vision Panel Axis / Floor = 1500



Delrin Hinges with or without hold open at 90°

350x550 Laminated Glass vision panel with EPDM seal

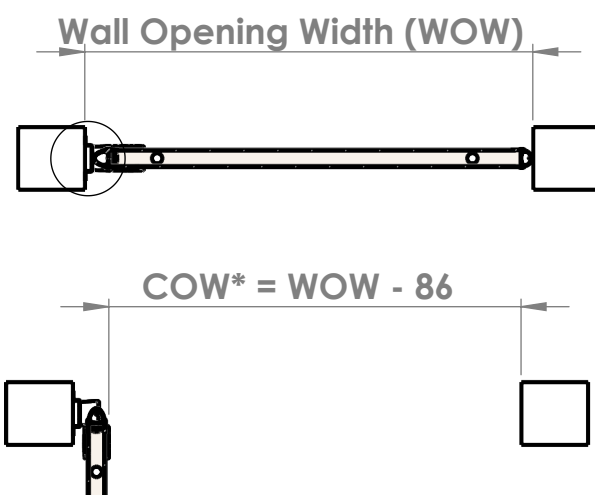

Omega Width = 101

Omega Frame for 160 mm thick wall (at least)

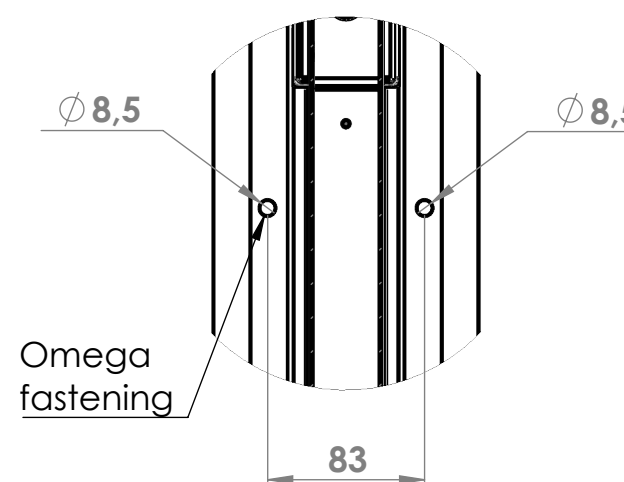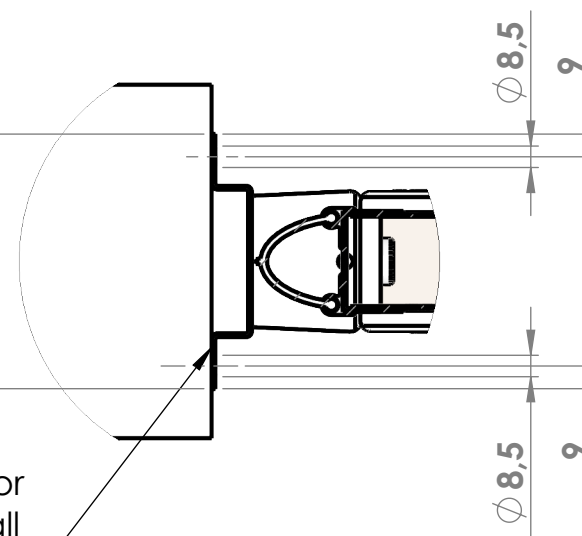

*COW : Clear Opening Width
**COH : Clear Opening Height


Type Porte :

SP900

Leaf with Delrin Hinges and
all stainless steel mechanism
Stainless steel Omega

SPENLE 

F-57400 SARREBOURG
+33 (0)3 87 25 78 00
www.spenle-international.com
info@spenle-international.com

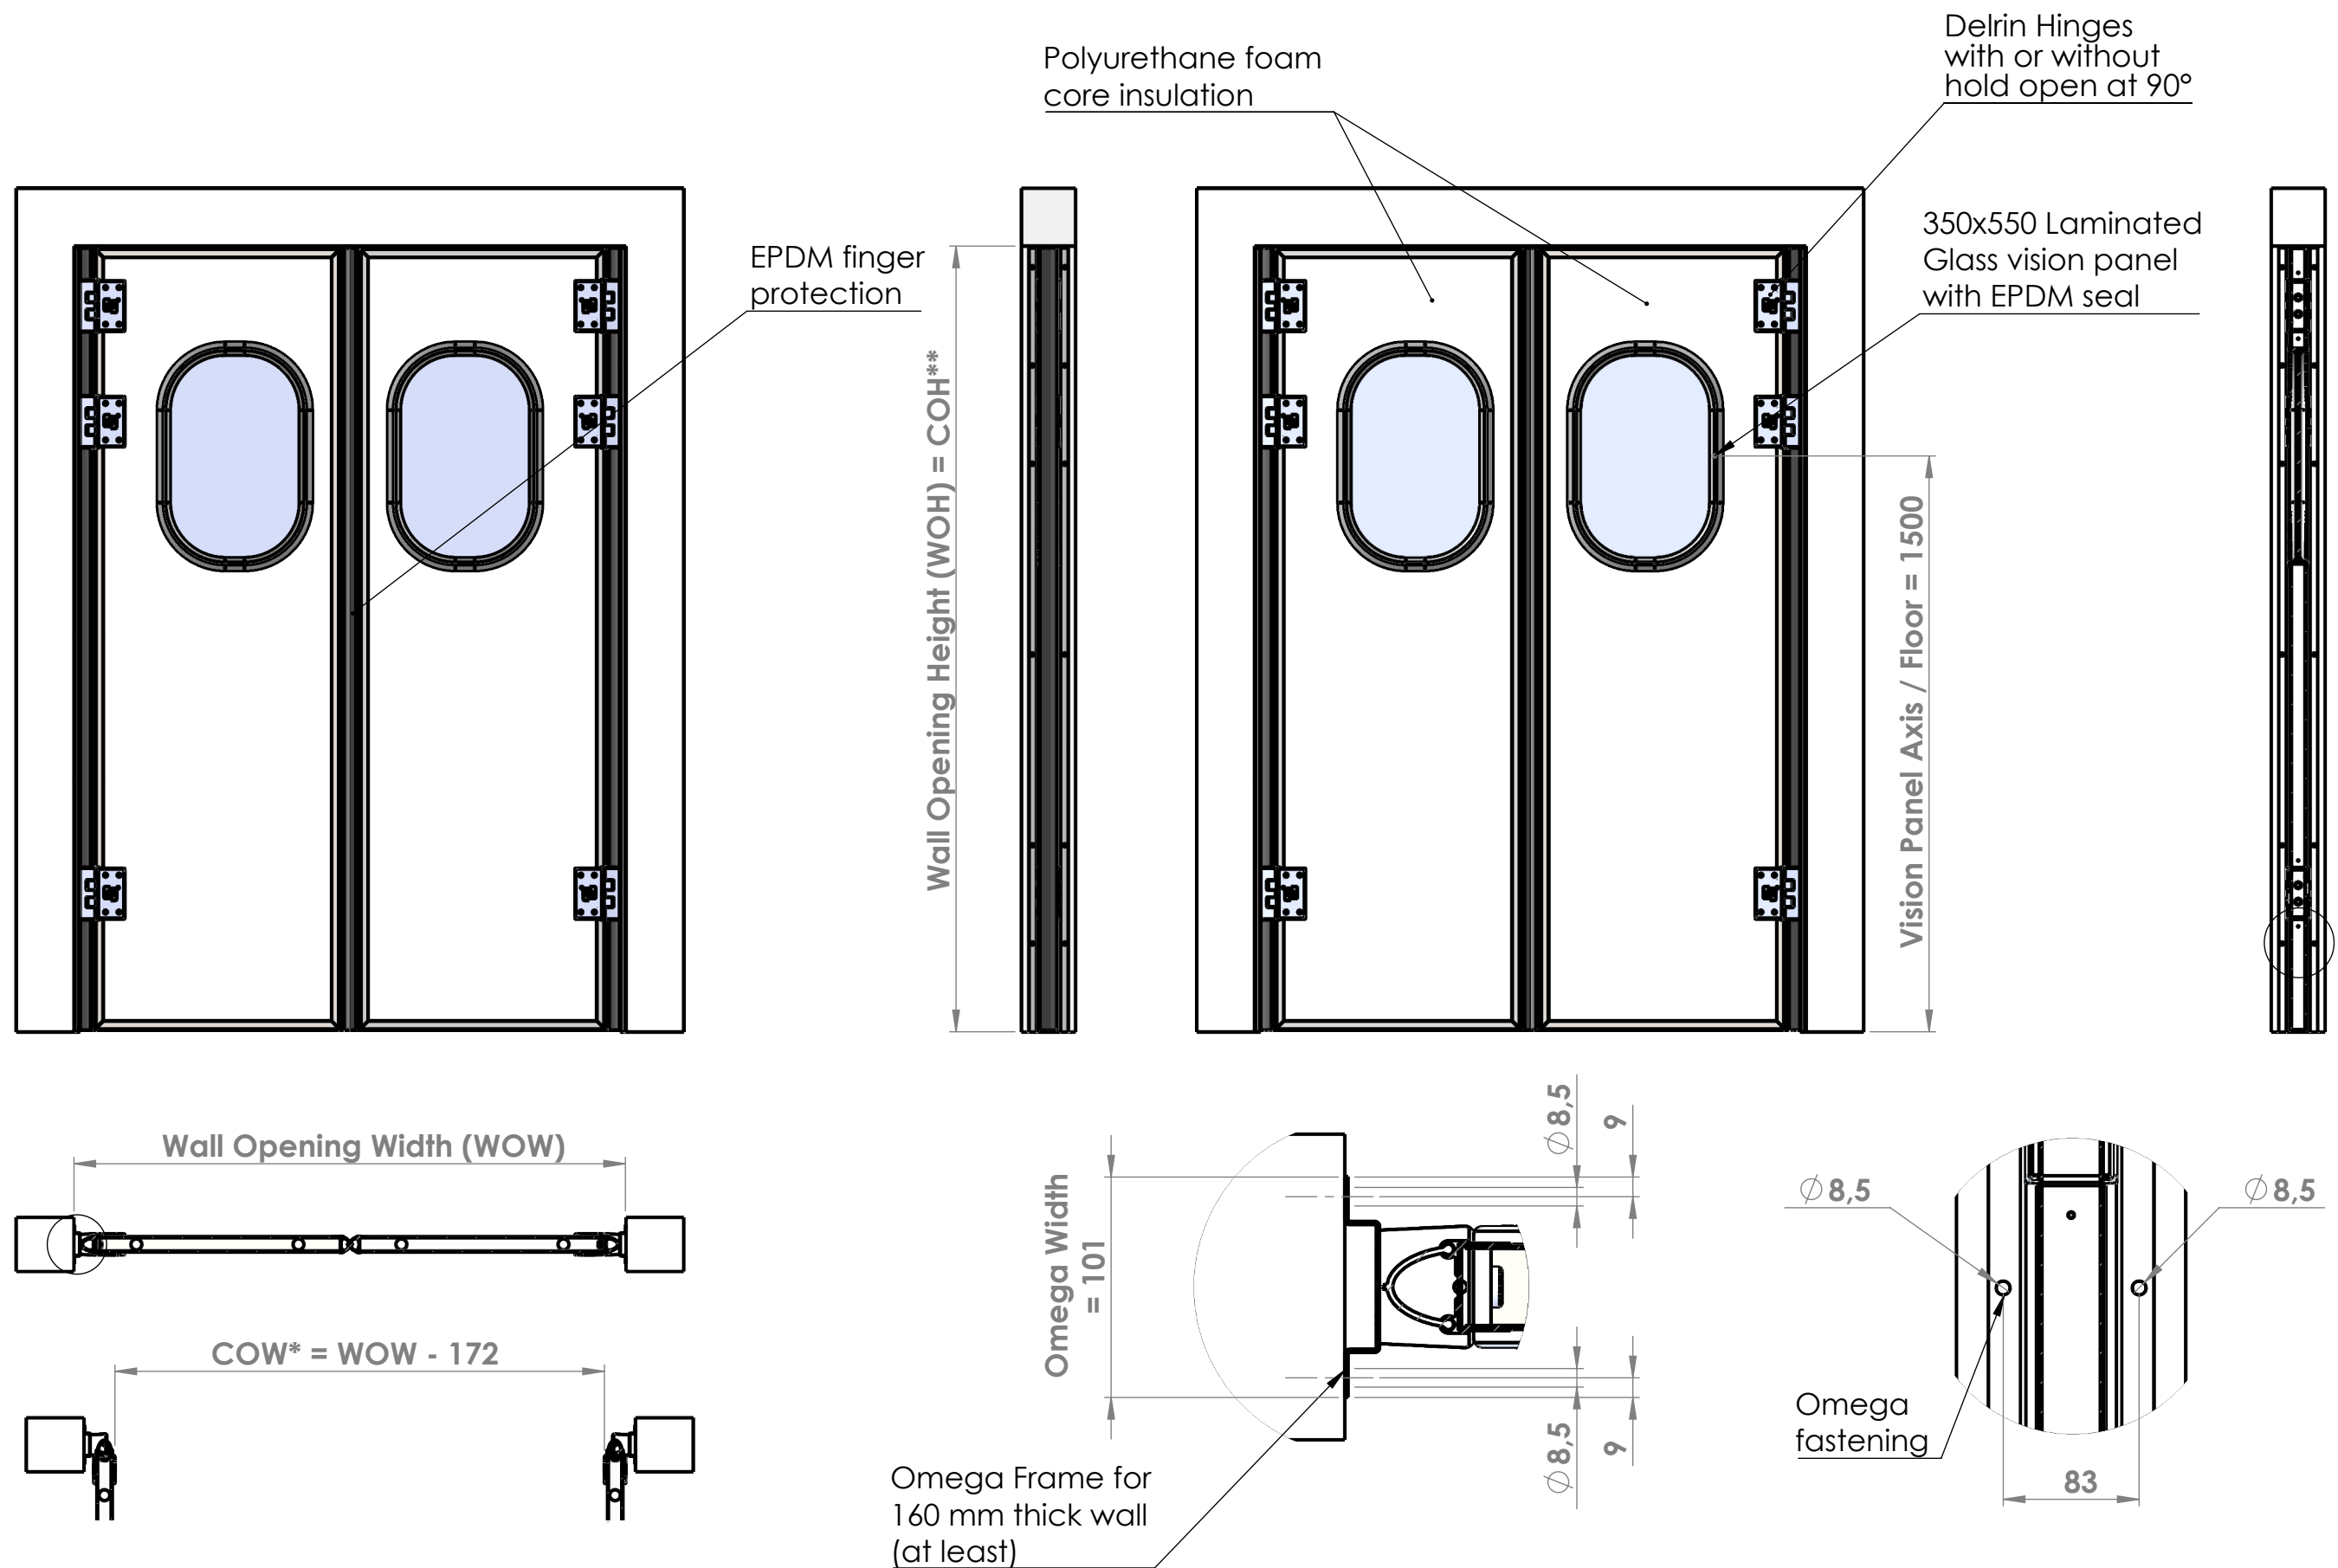

*COW : Clear Opening Width
 **COH : Clear Opening Height

Type Porte :

SP900

Leaf with Delrin Hinges and
 all stainless steel mechanism
 Stainless steel Omega

SPENLE 

F-57400 SARREBOURG
 +33 (0)3 87 25 78 00
www.spenle-international.com
info@spenle-international.com