
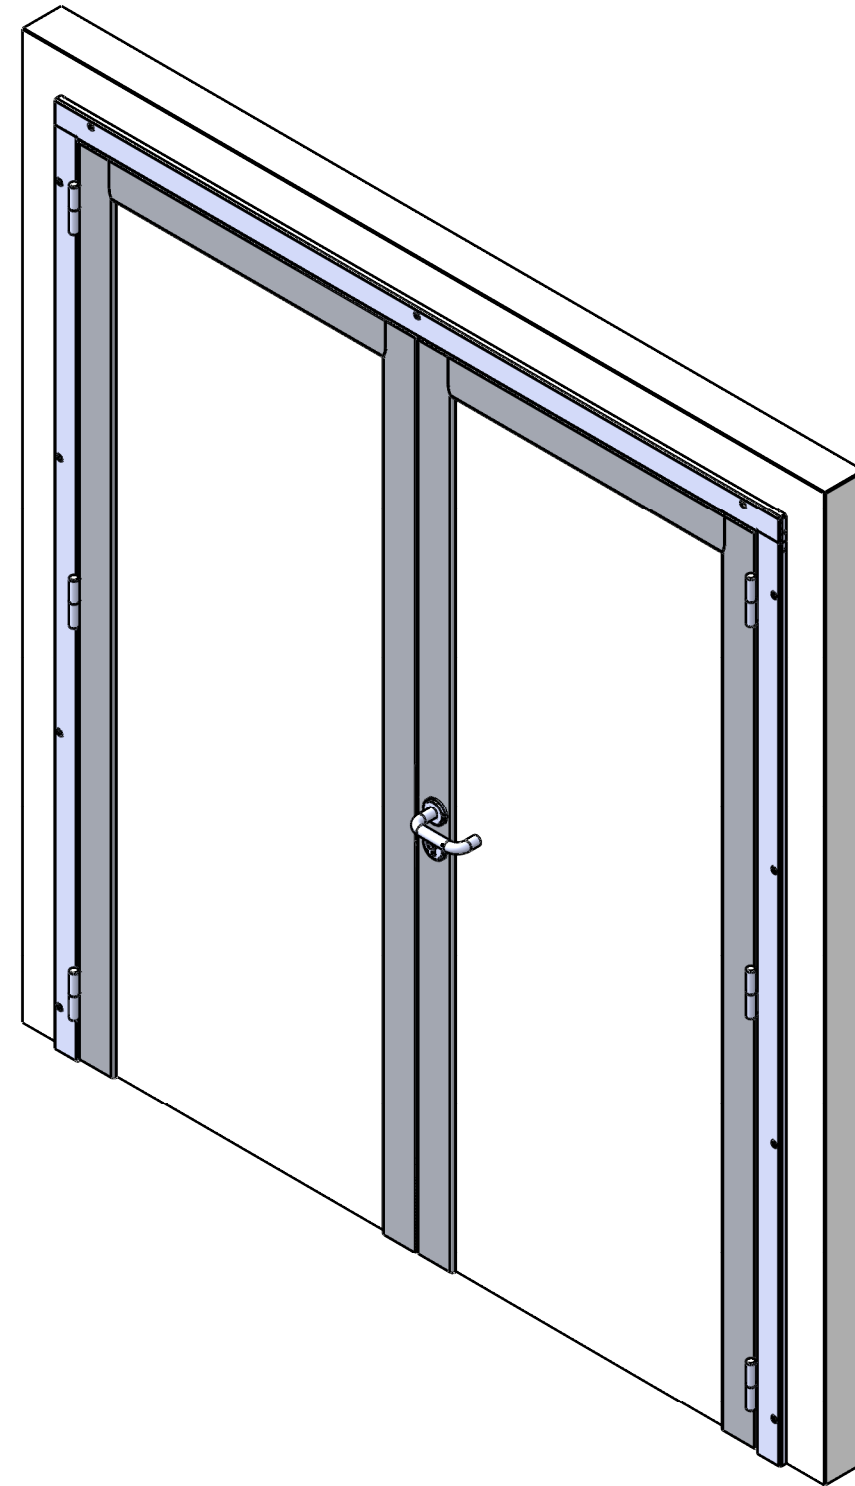



## Polyethylene Service Door SP130

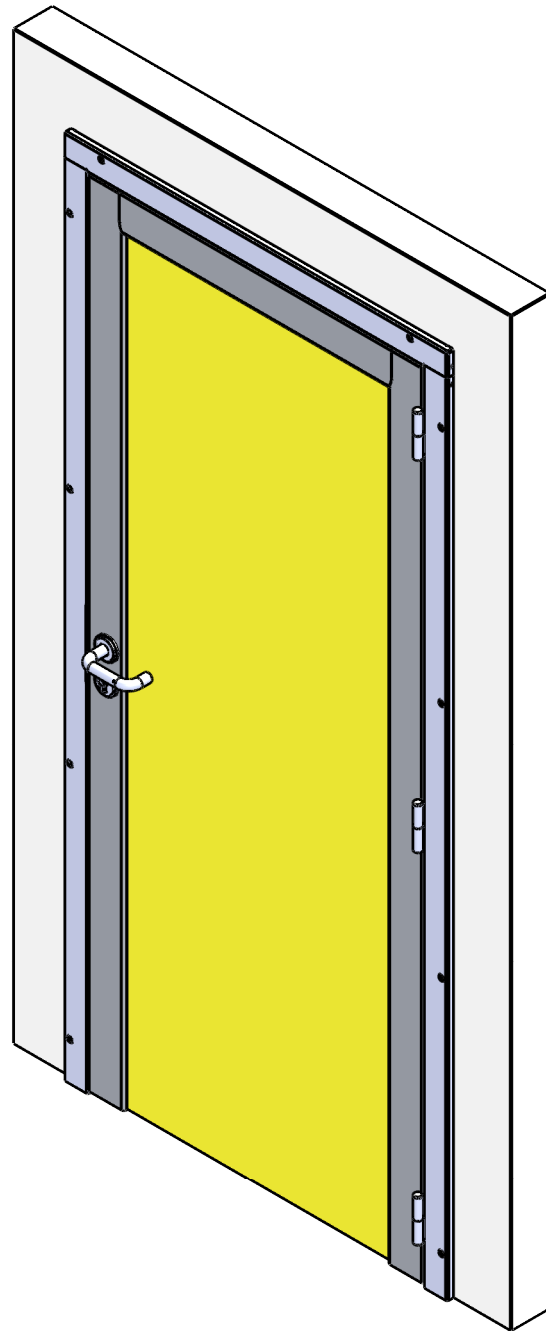

Door Type :  
**SP130**

Polyethylene Leaf  
Stainless steel U or C shaped  
Frame

**SPENLE**   
F-57400 SARREBOURG  
+33 (0)3 87 25 78 00  
[www.spenle-international.com](http://www.spenle-international.com)  
[info@spenle-international.com](mailto:info@spenle-international.com)

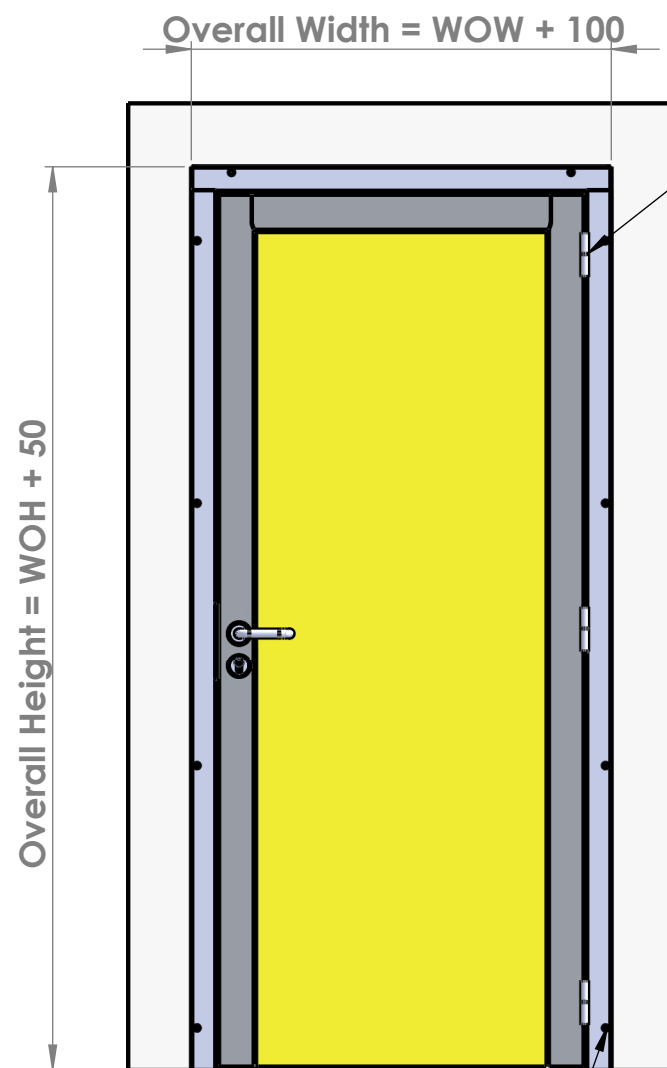

Stainless steel hinges

Wall Thickness

Wall Opening Height (WOH)

COH\*\* = WOH - 30

Reinforcement with 35 mm thick grey polyethylene 3 sides

HDPE 500 15 mm Thick





Stainless steel handle

Lock with cylinder

Handle Axis / Floor = 1040



C shaped Frame:  
Double drilling (Ø 13; Ø 6.1) for fixing with dowel  
Double drilling (Ø 13; Ø 8.5) for through fixing

U shaped Frame:  
Drilling (Ø 6.1) for fixing with dowel  
Drilling (Ø 11.1) for through fixing

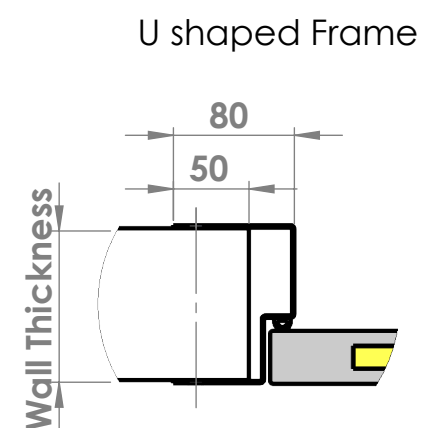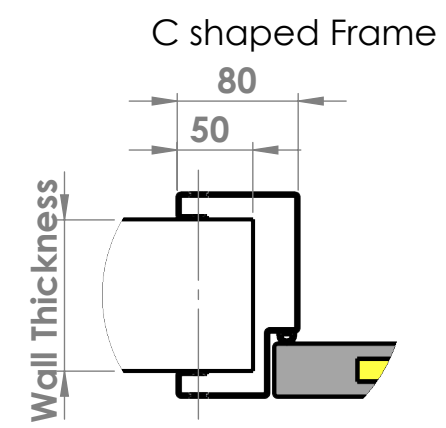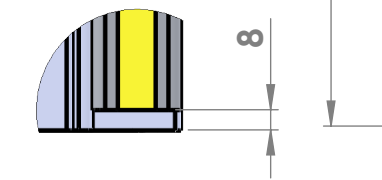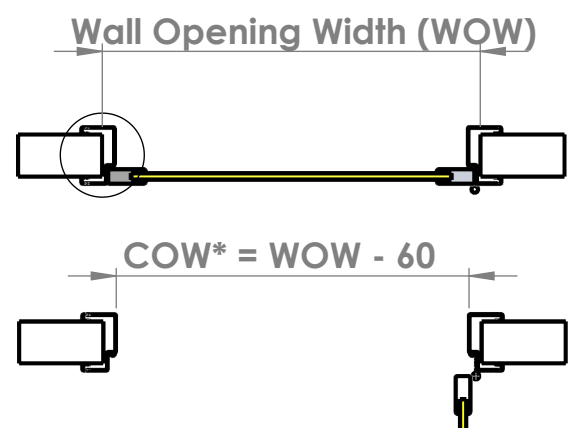

Right Pulling  
Left Pushing


Left Pulling  
Right Pushing

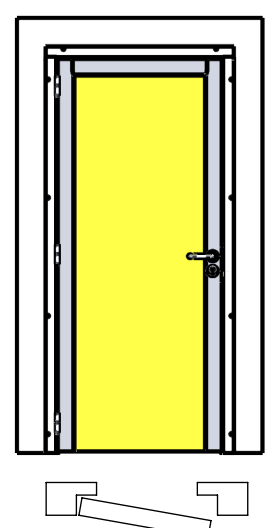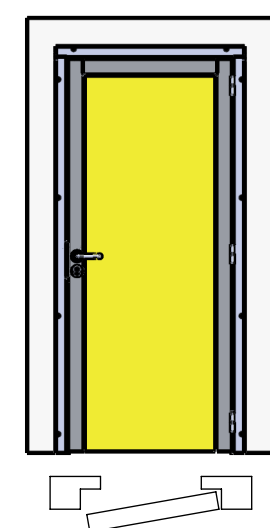


COW\* : Clear Opening Width  
COH\*\* : Clear Opening Height

Door Type : <b>SP130</b>	Polyethylene Leaf Stainless steel U or C shaped Frame
-----------------------------	--

**SPENLE**   
F-57400 SARREBOURG  
+33 (0)3 87 25 78 00  
www.spenle-international.com  
info@spenle-international.com

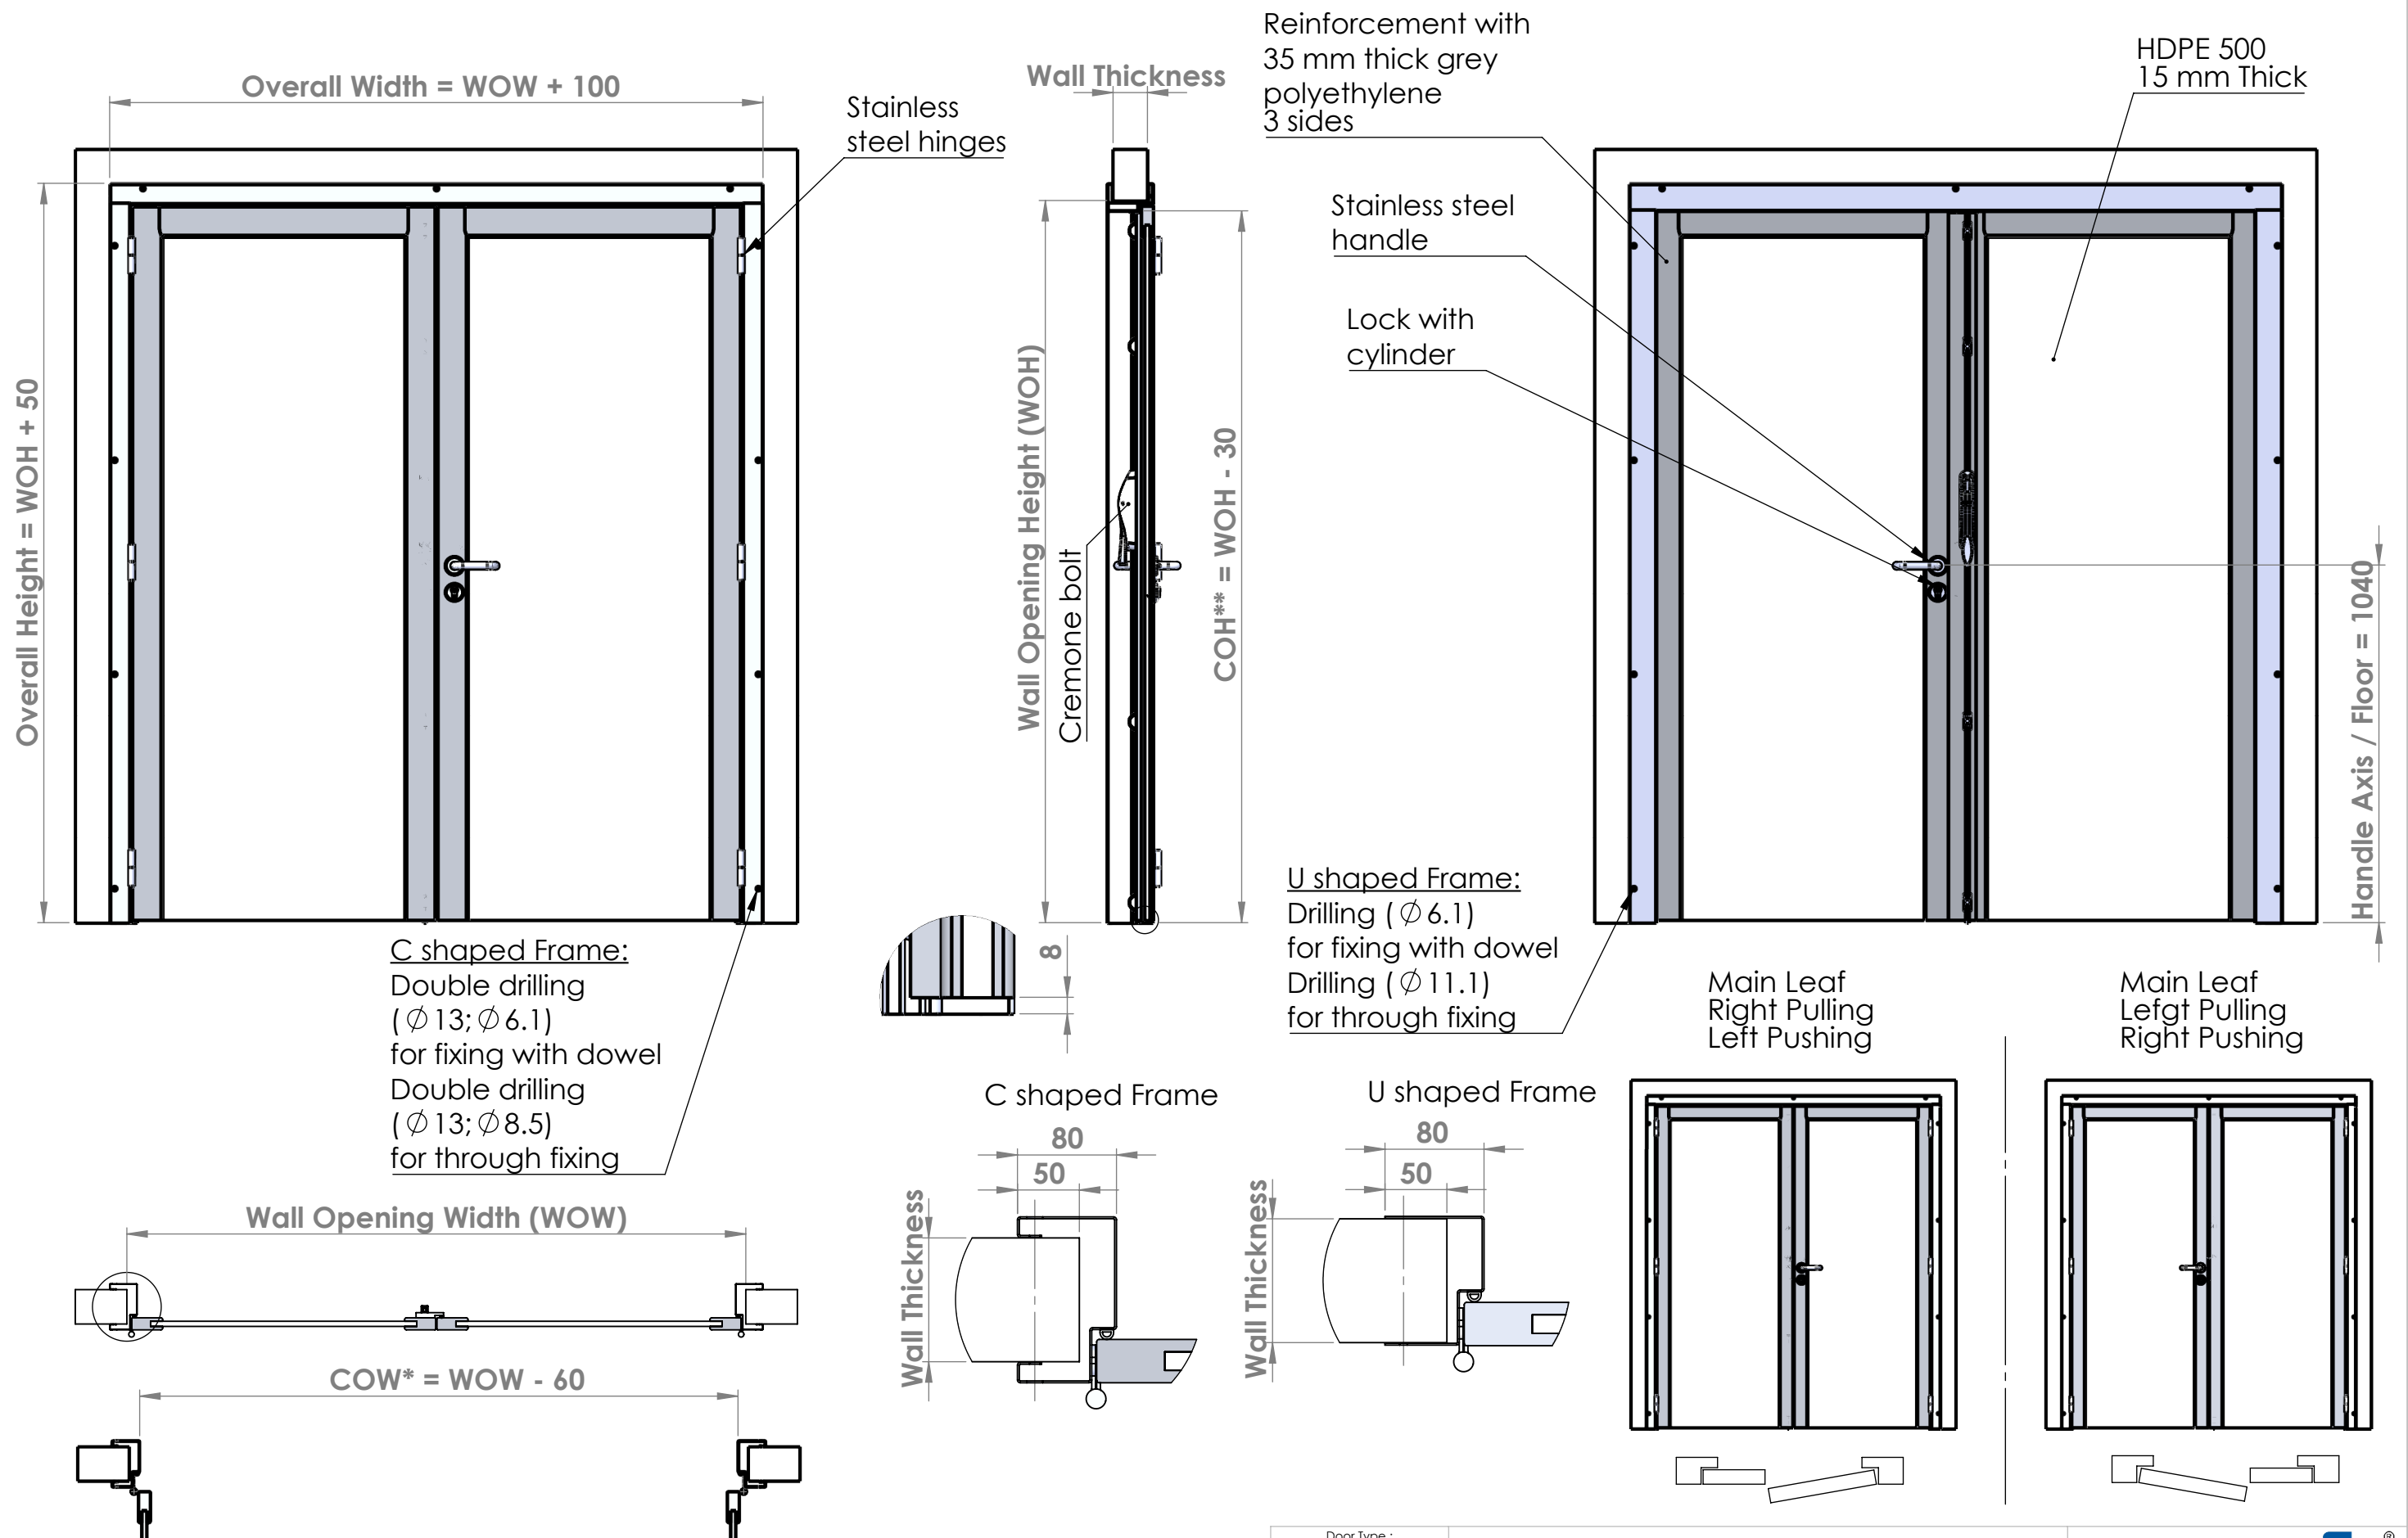

COW\* : Clear Opening Width  
COH\*\* : Clear Opening Height

<p>Door Type :</p> <p><b>SP130</b></p>	<p>Polyethylene Leaf</p> <p>Stainless steel U or C shaped Frame</p>	<p><b>SPENLE</b> </p> <p>F-57400 SARREBOURG +33 (0)3 87 25 78 00 www.spenle-international.com info@spenle-international.com</p>
--	---	--